



COB

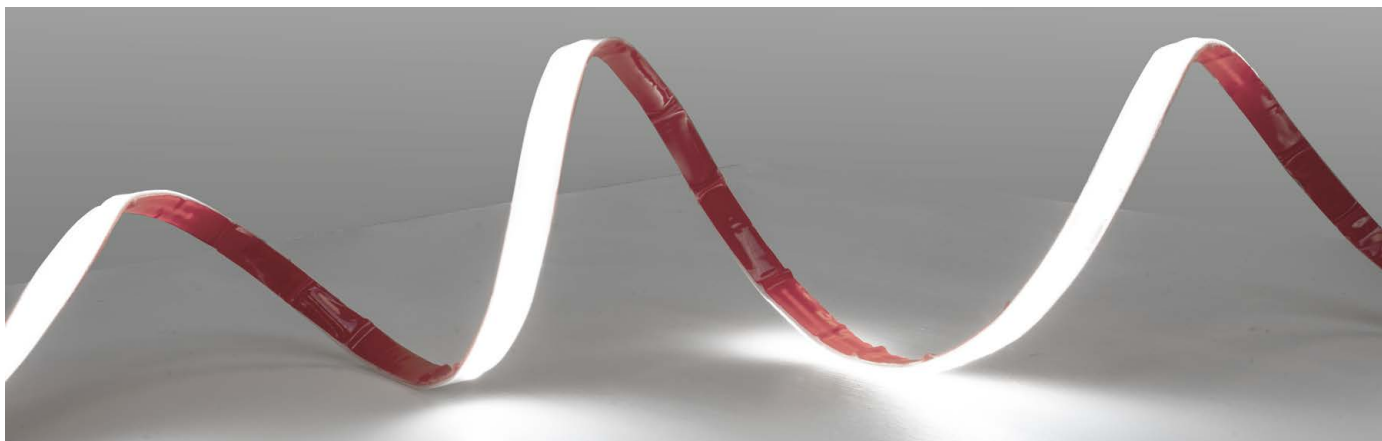


30000
 >100
 >90
 110/240
 50/60
 DIMMABLE
 45/-20
 120°

REF.	W	TONO K°	LUM/M	IP	
15101427	14	2700	1330	65	50
15101440	14	4000	1400	65	50
15101460	14	6000	1470	65	50

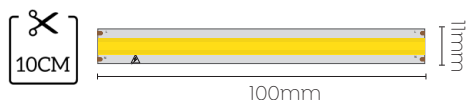

SMD

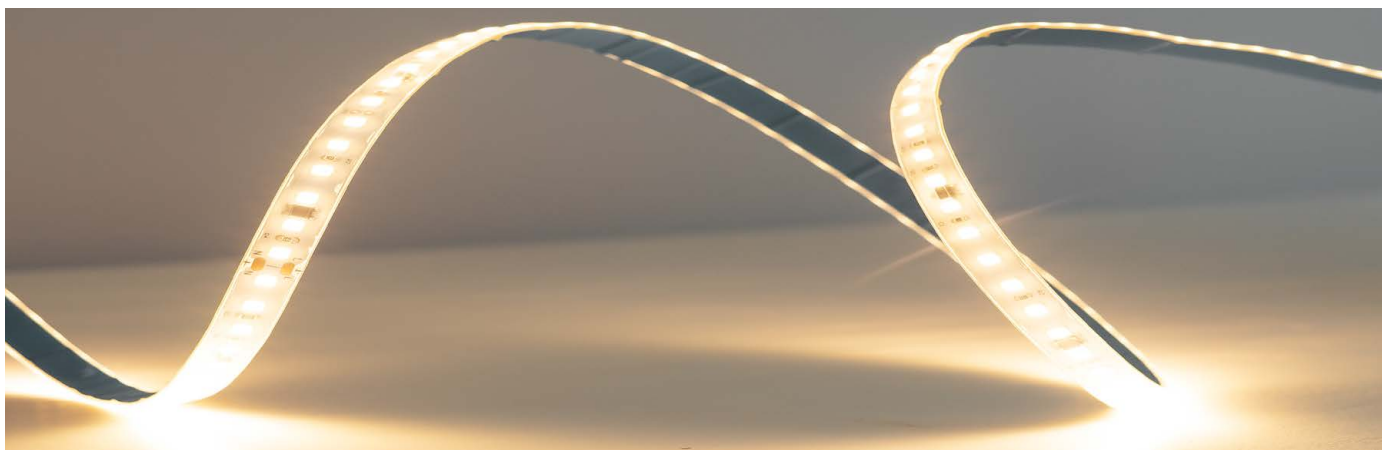

30000
 >100
 >90
 110/240
 50/60
 DIMMABLE
 45/-20
 120°

REF.	W	TONO K°	LED/M	LUM/M	IP	
15200927	9	2700	120	859	65	50
15200940	9	4000	120	900	65	50
15200960	9	6000	120	945	65	50
15201427	14	2700	120	1330	65	50
15201440	14	4000	120	1400	65	50
15201460	14	6000	120	1470	65	50
15201827	18	2700	120	1710	65	50
15201840	18	4000	120	1800	65	50
15201860	18	6000	120	1890	65	50

